

MakeMyLed model MML-REMOTE-B dimmer Instruction Manual

Product Specification

Product name: Two Channel Remote Touch controller



Introduction:

A high capacity easy to use dual channel remote with On/Off and several handy dimming controls. Dims or Brightens two output channels separately and features master On/Off buttons, Channel 1, Channel 2 buttons, step increase/decrease buttons and a channel blend wheel

Technical parameters:

Receiver:

Working temperature: -20°C~ 60°C

Output: 2 channels

Static power consumption: <0.5W

controller dimension: : L83 X W79 X H33 mm

Net Weight: 168g

Supply Voltage: DC5V / DC 12V-24V,

Connection mode: Common anode

Output current: 6A*2CH=12A

Package size: L205XW135XH45mm

Gross Weight: 392g

Remote Control:

Working temperature: -20°C - 60°C

Supply voltage: 3V

Static current: 10uA

Remote-controlled distance: 20-30Meters


Power supply mode: AA battery *2pcs

Static power consumption: <0.09mW

Operating current: 15mA

Stand-by time: 6 months

MakeMyLed model MML-REMOTE-B dimmer Instruction Manual

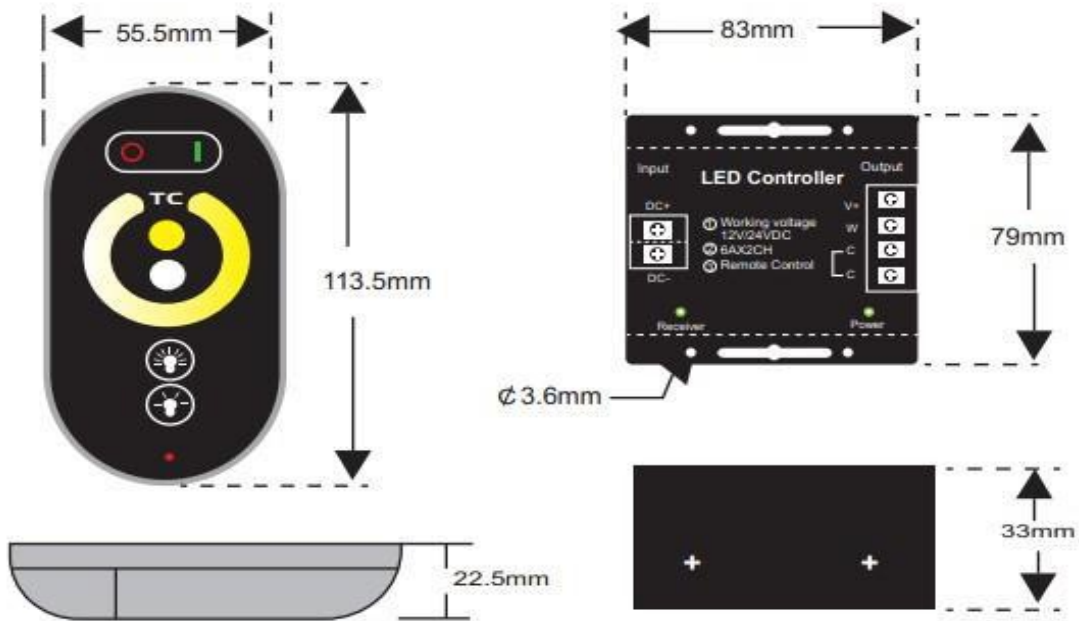

Remote control Function:

Button	Function
	Turn Off / Turn On
	Channel 1
	Channel 2
	Channel 1/2 blender
	Brightness+
	Brightness-